

Pu040098

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CITED BY APPLICANT

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093661 A2

(51) International Patent Classification⁷: G06T 9/00

[US/US]; 3 Brandywine Court, Manalapan, New Jersey 07726 (US).

(21) International Application Number:
PCT/US2005/006453

(74) Agents: TRIPOLI, Joseph, S. et al.; c/o Thomson Licensing Inc., 2 Independence Way, Suite 200, Princeton, New Jersey 08540 (US).

(22) International Filing Date: 1 March 2005 (01.03.2005)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:
60/551,417 9 March 2004 (09.03.2004) US

(71) Applicant (for all designated States except US): THOMSON RESEARCH FUNDING CORPORATION
[—/US]; 10330 North Meridian Street, INH 340, Indianapolis, IN 46290 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (for US only): TOURAPIS, Alexandros [GR/US]; 20212 Heather Drive, West Windsor, New Jersey 03550 (US). BOYCE, Jill, MacDonald

[Continued on next page]

(54) Title: REDUCED RESOLUTION UPDATE MODE FOR ADVANCED VIDEO CODING

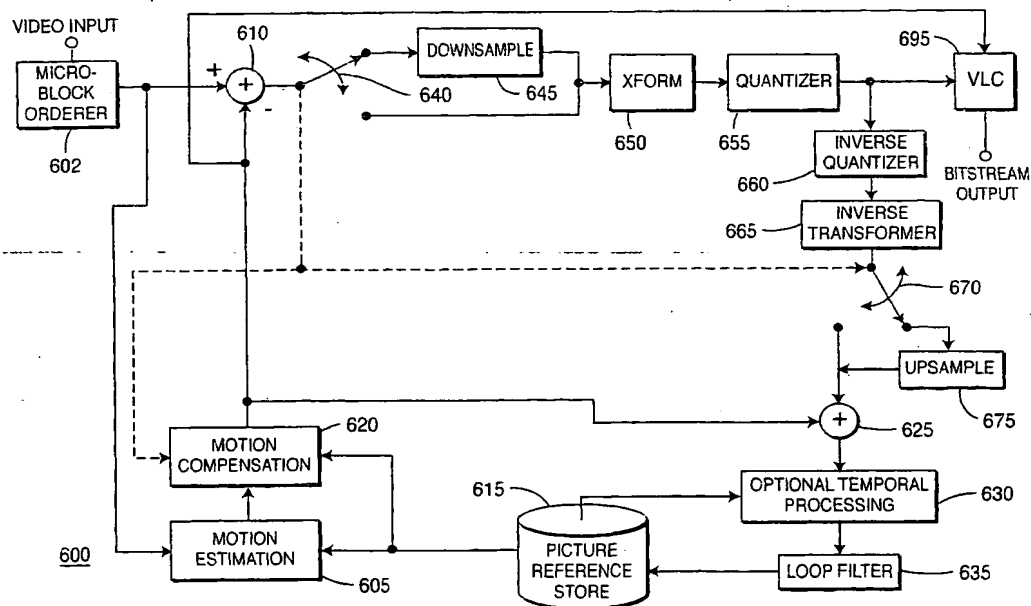

(57) Abstract: There is provided a video encoder, video decoder and corresponding encoding and decoding methods for respectively encoding and decoding video signal data for an image slice. The video encoder includes a slice prediction residual downsampler (645) for downsampling a prediction residual of at least a portion of the image slice prior to transformation and quantization of the prediction residual. The video decoder includes a prediction residual upsampler (715) for upsampling a prediction residual of the image slice.

REF. 5 DOCKET Pu040098
CORRES. COUNTRY: PCT
COUNTRY: PCT

WO 2005/093661 A2



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— without international search report and to be republished upon receipt of that report

REDUCED RESOLUTION UPDATE MODE FOR ADVANCED VIDEO CODING

5 GOVERNMENT LICENSE RIGHTS IN FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT

The U.S. Government has a paid-up license in this invention and the right in limited circumstances to require the patent owner to license others on reasonable terms as provided for by the terms of project ID contract No. 2003005676B awarded
10 by the National Institute of Standards and Technology.

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application Serial No. 60/551,417 (Attorney Docket No. PU040073), filed March 9, 2004 and entitled
15 "REDUCED RESOLUTION SLICE UPDATE MODE FOR ADVANCED VIDEO CODING", which is incorporated by reference herein in its entirety.

FIELD OF THE INVENTION

The present invention generally relates to video coders and decoders and,
20 more particularly, to a reduced resolution slice update mode for advanced video coding.

BACKGROUND OF THE INVENTION

The International Telecommunication Union, Telecommunication Sector (ITU-
25 T) H.264 (or Joint Video Team (JVT), or Moving Picture Experts Group ("MPEG")-4 Advanced Video Coding (AVC)) standard has introduced several new features that allows it to achieve considerable improvement in coding efficiency when compared to older standards such as MPEG-2/4, and H.263. Nevertheless, although H.264 includes most of the algorithmic features of older standards, some features were
30 were abandoned and/or never ported. One of these features was the consideration of the Reduced-Resolution Update mode that already exists within H.263. This mode provides the opportunity to increase the coding picture rate, while maintaining sufficient subjective quality. This is done by encoding an image at a reduced resolution, while performing prediction using a high resolution reference, which also

allows the final image to be reconstructed at full resolution. This mode was found useful in H.263 especially during the presence of heavy motion within the sequence since it allowed an encoder to maintain a high frame rate (and thus improved temporal resolution) while also maintaining high resolution and quality in stationary areas.

Although the syntax of a bitstream encoded in this mode was essentially identical to a bitstream coded in full resolution, the main difference was on how all modes within the bitstream were interpreted, and how the residual information was considered and added after motion compensation. More specifically, an image in this mode had $\frac{1}{4}$ the number of macroblocks compared to a full resolution coded picture, while motion vector data was associated with block sizes of 32×32 and 16×16 of the full resolution picture instead of 16×16 and 8×8 , respectively. On the other hand, Discrete Cosine Transform (DCT) and texture data are associated with 8×8 blocks of a reduced resolution image, while an upsampling process is required in order to generate the final full image representation.

Although this process could result in a reduction in objective quality, this is more than compensated from the reduction of bits that need to be encoded due to the reduced number (by 4) of modes, motion data, and residuals. This is especially important at very low bitrates where modes and motion data can be considerably more than the residual. Subjective quality was also far less impaired compared to objective quality. Also, this process can be seen somewhat similar to the application of a low pass filter on the residual data prior to encoding, which, however, requires the transmission of all modes, motion data, and filtered residuals, thus being less efficient. This concept was never introduced within H.264 and therefore is not supported in concept, methodology, or syntax.

SUMMARY OF THE INVENTION

These and other drawbacks and disadvantages of the prior art are addressed by the present invention, which is directed to developing and supporting a reduced resolution slice update mode for advanced video coding. The reduced resolution slice update mode disclosed herein is particularly suited for use with, but is not limited to, H.264 (or JVT, or MPEG-4 AVC).

According to an aspect of the present invention, there is provided a video encoder for encoding video signal data for an image slice. The video encoder includes a slice prediction residual downsampler for downsampling a prediction residual of at least a portion of the image slice prior to transformation and
5 quantization of the prediction residual.

According to another aspect of the present invention, there is provided a video encoder for encoding video signal data for an image. The video encoder includes macroblock ordering means and a slice prediction residual downsampler. The macroblock ordering means is for arranging macroblocks corresponding to the image
10 into two or more slice groups. The slice prediction residual downsampler is for downsampling a prediction residual of at least a portion of an image slice prior to transformation and quantization of the prediction residual. The slice prediction residual downsampler is further for receiving at least one of the two or more slice groups for downsampling.

According to still another aspect of the present invention, there is provided a video decoder for decoding video signal data for an image slice. The video decoder includes a prediction residual upsampler for upsampling a prediction residual of the image slice, and an adder for adding the upsampled prediction residual to a predicted
15 reference.

According to yet another aspect of the present invention, there is provided a method for encoding video signal data for an image slice, the method comprising the step of downsampling a prediction residual of the image slice prior to transformation and quantization of the prediction residual.
20

According to still yet another aspect of the present invention, there is provided
25 a method for decoding video signal data for an image slice. The method includes the steps of upsampling a prediction residual of the image slice, and adding the upsampled prediction residual to a predicted reference.

These and other aspects, features and advantages of the present invention will become apparent from the following detailed description of exemplary embodiments,
30 which is to be read in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention may be better understood in accordance with the following exemplary figures, in which:

FIG. 1 shows a diagram for exemplary macroblock and sub-macroblock partitions in a Reduced Resolution Update (RRU) mode for H.264 in accordance with the principles of the present invention;

FIG. 2 shows a diagram for exemplary samples used for 8x8 intra prediction in accordance with the principles of the present invention;

FIGs. 3A and 3B show diagrams for an exemplary residual upsampling process for block boundaries and for inner positions, respectively, in accordance with the principles of the present invention;

FIGs. 4A and 4B show diagrams for motion inheritance for direct mode if the current slice is in reduced resolution and the first list1 reference is in full resolution when direct_8x8_inference_flag is set to 0 and is set to 1, respectively;

FIG. 5 shows a diagram for resolution extension for a Quarter Common Intermediate Format (QCIF) resolution picture in accordance with the principles of the present invention;

FIG. 6 shows a block diagram for an exemplary video encoder in accordance with the principles of the present invention;

FIG. 7 shows a block diagram for an exemplary video decoder in accordance with the principles of the present invention;

FIG. 8 shows a flow diagram for an exemplary encoding process in accordance with the principles of the present invention; and

FIG. 9 shows a flow diagram for an exemplary decoding process in accordance with the principles of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention is directed to a reduced resolution slice update mode for advanced video coding. The present invention utilizes the concept of a Reduced Resolution Update (RRU) Mode, currently supported by the ITU-T H.263 standard, and allows for an RRU Mode to be introduced and used within the new ITU-T H.264 (MPEG-4 AVC/JVT) video coding standard. This mode provides the opportunity to increase the coding picture rate, while maintaining sufficient subjective quality. This is done by encoding an image at a reduced resolution, while performing prediction using a high resolution reference. This allows the final image to be reconstructed at full resolution and with good quality, although the bitrate required to encode the image has been reduced considerably. Considering that H.264 does not support the

RRU mode, the present invention utilizes several new and unique tools and concepts to implement it's RRU. For example, in developing RRU for H.264, the concept had to be modified to fit within the specifications of the new standard and/or its extensions. This includes new syntax elements, and certain semantic and encoder/decoder architecture modifications to inter and intra prediction modes. The impacts on other tools/features that are supported by the H.264 standard, such as Macroblock Based Adaptive Field/Frame mode, are also described and addressed herein.

The instant description illustrates the principles of the present invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the invention and are included within its spirit and scope.

All examples and conditional language recited herein are intended for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions.

Moreover, all statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

Thus, for example, it will be appreciated by those skilled in the art that the block diagrams presented herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any flow charts, flow diagrams, state transition diagrams, pseudocode, and the like represent various processes which may be substantially represented in computer readable media and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

The functions of the various elements shown in the figures may be provided through the use of dedicated hardware as well as hardware capable of executing software in association with appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared

processor, or by a plurality of individual processors, some of which may be shared. Moreover, explicit use of the term "processor" or "controller" should not be construed to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor ("DSP") hardware, read-only
5 memory ("ROM") for storing software, random access memory ("RAM"), and non-volatile storage.

Other hardware, conventional and/or custom, may also be included. Similarly, any switches shown in the figures are conceptual only. Their function may be carried out through the operation of program logic, through dedicated logic, through the
10 interaction of program control and dedicated logic, or even manually, the particular technique being selectable by the implementer as more specifically understood from the context.

In the claims hereof, any element expressed as a means for performing a specified function is intended to encompass any way of performing that function
15 including, for example, a) a combination of circuit elements that performs that function or b) software in any form, including, therefore, firmware, microcode or the like, combined with appropriate circuitry for executing that software to perform the function. The invention as defined by such claims resides in the fact that the functionalities provided by the various recited means are combined and brought
20 together in the manner which the claims call for. Applicant thus regards any means that can provide those functionalities as equivalent to those shown herein.

Advantageously, the present invention provides an apparatus and method for implementing a Reduced-Resolution Update (RRU) mode within H.264. Certain aspects of the CODEC regarding this new mode need to be considered. Specifically,
25 it is necessary to develop a new slice parameter (reduced_resolution_update) according to which the current slice is subdivided into $(RRUwidth * 16) \times (RRUheight * 16)$ size macroblocks. Unlike in H.263, it is not necessary that RRUwidth be equal to RRUheight. Additional slice parameters can be included, more specifically $rru_width_scale = RRUwidth$ and $rru_height_scale = RRUheight$ which
30 allows for the reduction of resolution horizontally or vertically at any desired ratio. Table 11 presents H.264 slice header syntax with consideration of Reduced Resolution Update (RRU), in accordance with the principles of the present invention.

Possible options, for example, include scaling by 1 horizontally & 2 vertically (macroblocks (MBs) are of size 16x32), 2 vertically & 1 horizontally (MB size 32x16), or in general have MBs of size $(rru_width_scale*16) \times (rru_height_scale*16)$.

Without loss in generality, the case is discussed where $RRUwidth =$
5 $RRUheight = 2$ and the macroblocks are of size 32x32. In this case, all macroblock partitions and sub-partitions have to be scaled by 2 horizontally and 2 vertically. FIG. 1 shows a diagram for exemplary macroblock partitions 100 and sub-macroblock partitions 150 in a Reduced Resolution Update (RRU) mode for H.264 in accordance with the principles of the present invention. Unlike H.263 where motion
10 vector data had to be divided by 2 to conform to the standards specifics, this is not necessary in H.264 and motion vector data can be coded in full resolution/subpel accuracy. Skipped macroblocks in P slices are in this mode considered as having 32x32 size, while the process for computing their associated motion data remains unchanged, although 32x32 neighbors need to now be considered instead of 16x16
15 neighbors.

Another key difference of this invention, although optional, is that in H.264, texture data does not have to represent information from a lower resolution image. Since intra coding in H.264 is performed through the consideration of spatial prediction methods using either 4x4 or 16x16 block sizes, this can be extended,
20 similarly to inter prediction modes, to 8x8 and 32x32 intra prediction block sizes. Prediction modes nevertheless remain more or less the same, although now more samples are used to generate the prediction signal. FIG. 2 shows a diagram for exemplary samples 200 used for 8x8 intra prediction in accordance with the principles of the present invention. The samples 200 include samples C0-C15, X,
25 and R0-R7. For example, for 8x8 vertical prediction, samples C0-C7 are now used, while DC prediction is the mean of C0-C7 and R0-R7. Furthermore, all diagonal predictions need to also consider samples C8-C15. A similar extension can be applied to the 32x32 intra prediction mode.

The residual data is then downsampled and is coded using the same
30 transform and quantization process already available in H.264. The same process is applied for both Luma and Chroma samples. During decoding the residual data needs to be upsampled. The downsampling process is done only in the encoder, and hence does not need to be standardized. The upsampling process must be matched in the encoder and the decoder, and so must be standardized. Possible upsampling

methods that could be used include, but are not limited to, zero or first order hold or by considering a similar strategy as in H.263. FIGs. 3A and 3B show diagrams for an exemplary residual upsampling processes 300 and 350 for block boundaries and for inner positions, respectively, in accordance with the principles of the present invention. In FIG. 3a, the upsampling process on block edges uses only samples inside the block boundaries to compute the upsampled values. In FIG. 3b, inside the interior of the block, all of the nearest neighbor positions are available, so an interpolation based on relative positioning of the sample, e.g. bilinear interpolation in two dimensions, is used to compute the upsampled values.

10 H.264 also considers an in-loop deblocking filter, applied to 4x4 block edges. Since currently the prediction process is now applied to block sizes of 8x8 and above, this process is also modified to consider 8x8 block edges instead. However, it is to be appreciated that, given the teachings of the present invention provided herein, one of ordinary skill in the related art will contemplate these and other sizes for block edges employed in accordance with the principles of the present invention, while maintaining the spirit of the present invention.

Different slices in the same picture may have different values of reduced_resolution_update, rru_width_scale and rru_height_scale. Since the in-loop deblocking filter is applied across slice boundaries, blocks on either side of the slice boundary may have been coded at different resolutions. In this case, for the deblocking filter parameters computation, the following is to be considered: the largest Quantization Parameter (QP) value among the two neighboring 4x4 normal blocks on a given 8x8 edge, while the strength of the deblocking is now based on the total number of non-zero coefficients of the two blocks.

25 To support Flexible Macroblock Ordering (FMO) as indicated by num_slice_groups_minus1 greater than 0 in the picture parameter sets, with Reduced Resolution Update mode, it is also necessary to transmit in the picture parameter set an additional parameter named reduced_resolution_update_enable. Table 10 presents H.264 picture parameter syntax with consideration of Reduced Resolution Update (RRU), in accordance with the principles of the present invention. It is not allowed to encode a slice using the Reduced Resolution Mode if FMO is present and this parameter is not set. Furthermore, if this parameter is set, the parameters rru_max_width_scale and rru_max_height_scale also need to be transmitted. These parameters are necessary to ensure that the map provided can

always support the current Reduced Resolution macroblock size. This means that it is necessary for these parameters to conform to the following conditions:

5 max_width_scale % rru_width_scale=0,
 max_height_scale % rru_height_scale=0 and,
 max_width_scale>0, max_height_scale>0.

10 The FMO slice group map that is transmitted corresponds to the lowest allowed reduced resolution, corresponding to rru_max_width_scale and rru_max_height_scale. Note that if multiple macroblock resolutions are used, then rru_max_width_scale and rru_max_height_scale need to be multiples of the least common multiple of all possible resolutions within the same picture.

15 Direct modes in H.264 are affected depending on whether the current slice is in reduced resolution mode, or the list1 reference is in reduced resolution mode and the current one is not in reduced resolution mode. For the direct mode case, when the current picture is in reduced resolution and the reference picture is of full resolution, a similar method currently employed within H.264 is borrowed from when the direct_8x8_inference_flag is enabled. According to this method, co-located partitions are assigned by considering only the corresponding corner 4x4 blocks
20 (corner is based on block indices) of an 8x8 partition. In our case, if direct belongs to a reduced resolution slice, motion data for the co-located partition are derived as if direct_8x8_inference_flag was set to 1. This can be seen also as a downsampling of the motion field of the co-located reference. Although not necessary, if the direct_8x8_inference_flag was already set within the bitstream, this process could be
25 applied twice. This process can be seen more clearly in FIGs. 4A and 4B, which show diagrams for motion inheritance 400 for direct mode if the current slice is in reduced resolution and the first list1 reference is in full resolution when direct_8x8_inference_flag is set to 0 and is set to 1, respectively. For the case when the current slice is not in reduced resolution mode, but its first list1 reference is in
30 reduced resolution mode, it is necessary to first upsample all motion data of this reduced resolution reference. Motion data can be upsampled using zero order hold, which is the method with the least complexity. Other filtering methods, for example similar to the process used for the upsampling of the residual data, could also be used.

Some other tools of H.264 are also affected through the consideration of this mode. More specifically, macroblock adaptive field frame mode (MB-AFF) needs to be now considered using a 32x64 super-macroblock structure. The upsampling process is performed on individual coded block residuals. If field pictures are coded, then the blocks are coded as field residuals, and hence the upsampling is done in fields. Similarly, when MB-AFF is used, individual blocks are coded either in field or frame mode, and their corresponding residuals are upsampled in field or frame mode respectively.

To allow the reduced resolution mode to work for all possible resolutions, a picture is always extended vertically and horizontally in order to be always divisible by $16 * rru_height_scale$ and $16 * rru_width_scale$, respectively. For the example where $rru_height_scale = rru_width_scale = 2$, the original resolution of an image was $H_R \times V_R$ the image is padded to a resolution equal to $H_C \times V_C$ where:

$$H_C = ((H_R + 31) / 32) * 32$$

$$V_C = ((V_R + 31) / 32) * 32$$

The process for extending the image resolution is similar to what is currently done for H.264 to extend the picture size to be divisible by 16. FIG. 5 shows a diagram for resolution extension for a Quarter Common Intermediate Format (QCIF) resolution picture 500 in accordance with the principles of the present invention.

The extended luminance for a QCIF resolution picture is given by the following formula:

$$R_{RRU}(x, y) = R(x', y'),$$

where

$$x, y = \text{spatial coordinates of the extended referenced picture in the Pixel domain,}$$

$$x', y' = \text{spatial coordinates of the referenced picture in the pixel domain,}$$

$$R_{RRU}(x, y) = \text{pixel value of the extended referenced picture at } (x, y),$$

$$R(x', y') = \text{pixel value of the referenced picture at } (x', y')$$

$$\begin{aligned} x' &= 175 \text{ if } x > 175 \text{ and } x < 192 \\ &= x \quad \text{otherwise,} \end{aligned}$$

$$\begin{aligned} y' &= 143 \text{ if } y > 143 \text{ and } y < 160 \\ &= y \quad \text{otherwise,} \end{aligned}$$

A similar approach is used for extending chroma samples, but to half of the size.

Turning to FIG. 6, an exemplary video encoder is indicated generally by the reference numeral 600. A video input to the encoder 600 is coupled in signal communication with an input of a macroblock orderer 602. An output of the macroblock orderer 602 is coupled in signal communication with a first input of a motion estimator 605 and with a first input (non-inverting) of a first adder 610. A second input of the motion estimator 605 is coupled in signal communication with an output of a picture reference store 615. An output of the motion estimator 605 is coupled in signal communication with a first input of a motion compensator 620. A second input of the motion compensator 620 is coupled in signal communication with the output of the picture reference store 615. An output of the motion compensator is coupled in signal communication with a second input (inverting) of the first adder 610, with a first input (non-inverting) of a second adder 625, and with a first input of a variable length coder (VLC) 695. An output of the second adder 625 is coupled in signal communication with a first input of an optional temporal processor 630. A second input of the optional temporal processor 630 is coupled in signal communication with another output of the picture reference store 615. An output of the optional temporal processor 630 is coupled in signal communication with an input of a loop filter 635. An output of the loop filter 635 is coupled in signal communication with an input of the picture reference store 615.

An output of the first adder 610 is coupled in signal communication with an input of a first switch 640. An output of the first switch 640 is capable of being coupled in signal communication with an input of a downsampler 645 or with an input of a transformer 650. An output of the downsampler 645 is coupled in signal communication with the input of the transformer 650. An output of the transformer 650 is coupled in signal communication with an input of a quantizer 655. An output of the quantizer 655 is coupled in signal communication with an input of the variable

length coder 695 and with an input of an inverse quantizer 660. An output of the inverse quantizer 660 is coupled in signal communication with an input of an inverse transformer 665. An output of the inverse transformer 665 is coupled in signal communication with an input of a second switch 670. An output of the second switch 670 is capable of being coupled in signal communication with a second input of the second adder 625 or with an input of an upsampler 675. An output of the upsampler is coupled in signal communication with the second input of the second adder 625. An output of the variable length coder 695 is coupled to an output of the encoder 600. It is to be noted that when the first switch 640 and the second switch 670 are coupled in signal communication with the downsampler 645 and the upsampler 675, respectively, a signal path is formed from the output of the first adder 610 to a third input of the motion compensator 620 and to the input of the upsampler 675. It is to be appreciated that first switch 640 may include RRU mode determining means for determining an RRU mode. The macroblock orderer 602 arranges macroblocks of a given image into slice groups.

Turning to FIG. 7, an exemplary video decoder is indicated generally by the reference numeral 700. A first input of the decoder 700 is coupled in signal communication with an input of an inverse transformer/quantizer 710. An output of the inverse transformer/quantizer 710 is coupled in signal communication with an input of an upsampler 715. An output of the upsampler 715 is coupled in signal communication with a first input of an adder 720. An output of the adder 720 is coupled in signal communication with an optional spatio-temporal processor 725. An output of the spatio-temporal processor is coupled in signal communication with an output of the decoder 700. In the case that the spatio-temporal processor 725 is not employed, the output of the decoder 700 is taken from the output of the adder 720.

A second input of the decoder 700 is coupled in signal communication with a first input of a motion compensator 730. An output of the motion compensator 730 is coupled in signal communication with a second input of the adder 720. The adder 720 is used to combine the unsampled prediction residual with a predicted reference. A second input of the motion compensator 730 is coupled in signal communication with a first output of a reference buffer 735. A second output of the reference buffer 735 is coupled in signal communication with the spatio-temporal processor 725. The input to the reference buffer 735 is the decoder output. The inverse transformer/quantizer 710 inputs a residual bitstream and outputs a decoded

residue. The reference buffer 735 outputs a reference picture and the motion compensator 730 outputs a motion compensated prediction.

The decoder implementation shown in FIG. 7 can be extended and improved by using additional processing elements, such as spatio-temporal analysis in both the encoder and decoder, which would allow us to remove some of the artifacts introduced through the residual downsampling and upsampling process.

A variation of the above approach is to allow the use of reduced resolutions not just at the slice level, but also at the macroblock level. Although there may be different variations of this approach, one approach is to signal resolution variation through the usage of the reference picture indicator. Reference pictures could be associated implicitly (e.g., odd/even references) or explicitly (e.g., through a transmitted table in the slice parameters) with the transmission of full or reduced resolution residual. If a 32x32 macroblock is coded using reduced residual, then a single codedblockpattern (cbp) is associated and transmitted with the transform coefficients of the 16 reduced resolution blocks. Otherwise, 4 cbp (or a single combined one) needs to be transmitted, which are associated with 64 full resolution blocks. Note that for this method to work, all blocks within this macroblock need to be coded in the same resolution. This method requires the transmission of an additional table, which would provide the information regarding the scaling, or not of the current reference, including the scaling parameters, similarly to what is currently done for weighted prediction.

Turning to FIG. 8, an exemplary video encoding process is indicated generally by the reference numeral 800. The process 800 includes a start block 805 that passes control to a loop limit block 810. The loop limit block 810 begins a loop for a current block in an image, and passes control to a function block 815. The function block 815 forms a motion compensated prediction of the current block, and passes control to a function block 820. The function block 820 subtracts the motion compensated prediction from the current macroblock to form a prediction residual, and passes control to a function block 825. The function block 825 downsamples the prediction residual, and passes control to a function block 830. The function block 830 transforms and quantizes the downsampled prediction residual, and passes control to a function block 835. The function block 835 inverse transforms and quantizes the prediction residual to form a coded prediction residual, and passes control to a function block 840. The function block 840 upsamples the coded

residual, and passes control to a function block 845. The function block 845 adds the upsampled coded residual to the prediction to form a coded picture block, and passes control to an end loop block 850. The end loop block 850 ends the loop and passes control to an end block 855.

5 Turning to FIG. 9, an exemplary decoding process is indicated generally by the reference numeral 900. The decoding process 900 includes a start block 905 that passes control to a loop limit block 910. The loop limit block 910 begins a loop for a current block in an image, and passes control to a function block 915. The function block 915 entropy decodes the coded residual, and passes control to a function block
10 920. The function block 920 inverse transforms and quantizes the decoded residual to form a coded residual, and passes control to a function block 925. The function block 925 upsamples the coded residual, and passes control to a function block 930. The function block 930 adds the upsampled coded residual to the prediction to form a coded picture block, and passes control to a loop limit block 935. The loop limit block
15 935 ends the loop and passes control to an end block 940.

These and other features and advantages of the present invention may be readily ascertained by one of ordinary skill in the pertinent art based on the teachings herein. It is to be understood that the teachings of the present invention may be implemented in various forms of hardware, software, firmware, special purpose
20 processors, or combinations thereof.

Most preferably, the teachings of the present invention are implemented as a combination of hardware and software. Moreover, the software is preferably implemented as an application program tangibly embodied on a program storage unit. The application program may be uploaded to, and executed by, a machine
25 comprising any suitable architecture. Preferably, the machine is implemented on a computer platform having hardware such as one or more central processing units ("CPU"), a random access memory ("RAM"), and input/output ("I/O") interfaces. The computer platform may also include an operating system and microinstruction code. The various processes and functions described herein may be either part of the microinstruction code or part of the application program, or any combination thereof,
30 which may be executed by a CPU. In addition, various other peripheral units may be coupled to the computer platform such as an additional data storage unit and a printing unit.

It is to be further understood that, because some of the constituent system components and methods depicted in the accompanying drawings are preferably implemented in software, the actual connections between the system components or the process function blocks may differ depending upon the manner in which the present invention is programmed. Given the teachings herein, one of ordinary skill in the pertinent art will be able to contemplate these and similar implementations or configurations of the present invention.

Although the illustrative embodiments have been described herein with reference to the accompanying drawings, it is to be understood that the present invention is not limited to those precise embodiments, and that various changes and modifications may be effected therein by one of ordinary skill in the pertinent art without departing from the scope or spirit of the present invention. All such changes and modifications are intended to be included within the scope of the present invention as set forth in the appended claims.

pic_parameter_set_rbsp() {	C	Descriptor
pic_parameter_set_id	1	ue(v)
seq_parameter_set_id	1	ue(v)
entropy_coding_mode_flag	1	u(1)
pic_order_present_flag	1	u(1)
num_slice_groups_minus1	1	ue(v)
if(num_slice_groups_minus1 > 0) {		
/* Consideration of RRU */		
reduced_resolution_update_enable	1	u(1)
if(!reduced_resolution_update) {		
rru_max_width_scale	1	u(v)
rru_max_height_scale	1	u(v)
}		
/* End of Reduced Resolution Update Parameters */		
slice_group_map_type	1	ue(v)
if(slice_group_map_type == 0)		
for(iGroup = 0; iGroup <= num_slice_groups_minus1; iGroup++)		
run_length_minus1[iGroup]	1	ue(v)
else if(slice_group_map_type == 2)		
for(iGroup = 0; iGroup < num_slice_groups_minus1; iGroup++) {		
top_left[iGroup]	1	ue(v)
bottom_right[iGroup]	1	ue(v)
}		
else if(slice_group_map_type == 3		
slice_group_map_type == 4		
slice_group_map_type == 5) {		
slice_group_change_direction_flag	1	u(1)
slice_group_change_rate_minus1	1	ue(v)
} else if(slice_group_map_type == 6) {		
pic_size_in_map_units_minus1	1	ue(v)
for(i = 0; i <= pic_size_in_map_units_minus1; i++)		
slice_group_id[i]	1	u(v)
}		
}		
num_ref_idx_l0_active_minus1	1	ue(v)
num_ref_idx_l1_active_minus1	1	ue(v)
weighted_pred_flag	1	u(1)
weighted_bipred_idc	1	u(2)
pic_init_qp_minus26 /* relative to 26 */	1	se(v)
pic_init_qs_minus26 /* relative to 26 */	1	se(v)
chroma_qp_index_offset	1	se(v)
deblocking_filter_control_present_flag	1	u(1)
constrained_intra_pred_flag	1	u(1)
redundant_pic_cnt_present_flag	1	u(1)
rbsp_trailing_bits()	1	
}		

TABLE 1

slice_header() {	C	Descriptor
first_mb_in_slice	2	ue(v)
slice_type	2	ue(v)
pic_parameter_set_id	2	ue(v)
frame_num	2	u(v)
/* Reduced Resolution Update parameters */		
reduced_resolution_update	2	u(1)
/* Following is optional */		
if(!reduced_resolution_update) {		
rru_width_scale	2	u(v)
rru_height_scale	2	u(v)
}		
/* End of Reduced Resolution Update Parameters */		
if(!frame_mbs_only_flag) {		
field_pic_flag	2	u(1)
if(field_pic_flag)		
bottom_field_flag	2	u(1)
}		
if(nal_unit_type == 5)		
idr_pic_id	2	ue(v)
if(pic_order_cnt_type == 0) {		
pic_order_cnt_lsb	2	u(v)
if(pic_order_present_flag && !field_pic_flag)		
delta_pic_order_cnt_bottom	2	se(v)
}		
if(pic_order_cnt_type == 1 && !delta_pic_order_always_zero_flag) {		
delta_pic_order_cnt[0]	2	se(v)
if(pic_order_present_flag && !field_pic_flag)		
delta_pic_order_cnt[1]	2	se(v)
}		
if(redundant_pic_cnt_present_flag)		
redundant_pic_cnt	2	ue(v)
if(slice_type == B)		
direct_spatial_mv_pred_flag	2	u(1)
if(slice_type == P slice_type == SP slice_type == B) {		
num_ref_idx_active_override_flag	2	u(1)
if(num_ref_idx_active_override_flag) {		
num_ref_idx_l0_active_minus1	2	ue(v)
if(slice_type == B)		
num_ref_idx_l1_active_minus1	2	ue(v)
}		
}		
ref_pic_list_reordering()	2	
if((weighted_pred_flag && (slice_type == P slice_type == SP)) (weighted_bipred_idc == 1 && slice_type == B))		
pred_weight_table()	2	

if(nal_ref_idc != 0)		
dec_ref_pic_marking()	2	
if(entropy_coding_mode_flag && slice_type != I && slice_type != SI)		
cabac_init_idc	2	ue(v)
slice_qp_delta	2	se(v)
if(slice_type == SP slice_type == SI) {		
if(slice_type == SP)		
sp_for_switch_flag	2	u(1)
slice_qs_delta	2	se(v)
}		
if(deblocking_filter_control_present_flag) {		
disable_deblocking_filter_idc	2	ue(v)
if(disable_deblocking_filter_idc != 1) {		
slice_alpha_c0_offset_div2	2	se(v)
slice_beta_offset_div2	2	se(v)
}		
}		
if(num_slice_groups_minus1 > 0 && slice_group_map_type >= 3 && slice_group_map_type <= 5)		
slice_group_change_cycle	2	u(v)
}		

TABLE 2

CLAIMS:

1. A video encoder (600) for encoding video signal data for an image slice comprising:

5 a slice prediction residual downsampler (645) adapted for selective coupling with the input of a transformer (650);

a quantizer (655) coupled with the output of the transformer (645); and

an entropy coder (695) coupled with the output of the quantizer (655),

10 wherein the slice prediction residual downsampler (645) is used to downsample a prediction residual of at least a portion of the image slice prior to transformation and quantization of the prediction residual.

2. The video encoder as defined in Claim 1, wherein the image slice comprises video data in compliance with the International Telecommunication Union,
15 Telecommunication Sector (ITU-T) H.264 standard.

3. The video encoder as defined in Claim 1, wherein the slice prediction residual downsampler (645) applies different downsampling operations for a horizontal direction and a vertical direction of the prediction residual.

20

4. The video encoder as defined in Claim 1, wherein downsampling resolution used in the slice prediction residual downsampler is signaled by parameters in the image slice.

25 5. The video encoder as defined in Claim 1, wherein the image slice is divided into image blocks, and a prediction residual is formed subsequent to an intra prediction for the image blocks.

6. The video encoder as defined in Claim 5, wherein the intra prediction is
30 performed using one of 8x8 and 32x32 prediction modes.

7. The video encoder as defined in Claim 1, wherein the image slice is divided into image blocks, and a prediction residual is formed subsequent to an inter prediction for the image blocks.

8. The video encoder as defined in Claim 1, wherein the slice prediction residual downsampler (645) applies a downsampling operation to only one of a horizontal direction and a vertical direction of the prediction residual.

5

9. The video encoder as defined in Claim 1, wherein the image slice is divided into macroblocks, and a reference index coded for an individual macroblock corresponds to whether the prediction residual for that individual macroblock will be downsampled.

10

10. The video encoder as defined in Claim 1, wherein the video signal data corresponds to an interlaced picture, the image slice is divided into image blocks, and the slice prediction residual downsampler (645) downsamples the prediction residual in one of a same mode as a current one of the coded image blocks, the same mode being one of a field mode and a frame mode.

15

11. A video encoder for encoding video signal data for an image, the video encoder comprising:

macroblock ordering means (602) for arranging macroblocks corresponding to the image into at least two slice groups; and

20

a slice prediction residual downsampler (645) for downsampling a prediction residual of at least a portion of an image slice prior to transformation and quantization of the prediction residual,

wherein said slice prediction residual downsampler is utilized to receive at least one of the slice groups for downsampling.

25

12. A video decoder for decoding video signal data for an image slice, the video decoder comprising:

a prediction residual upsampler (715) for upsampling a prediction residual of the image slice; and

30

a combiner (720) for combining the upsampled prediction residual with a predicted reference.

13. The video decoder as defined in Claim 12, wherein the image slice comprises video data in compliance with the International Telecommunication Union, Telecommunication Sector (ITU-T) H.264 standard.

5 14. The video decoder as defined in Claim 12, wherein the image slice is divided into macroblocks, and the video decoder further comprises Reduced Resolution Update (RRU) mode determining means connected in signal communication with prediction residual upsampler and responsive to reference indices at a macroblock level for determining whether the video decoder is in an RRU
10 mode, and wherein a prediction residual for a current macroblock is upsampled by said prediction residual upsampler to decode the current macroblock.

15 15. The video decoder as defined in Claim 12, wherein the slice prediction residual upsampler (715) applies different upsampling operations for a horizontal direction and a vertical direction of the prediction residual.

16. The video decoder as defined in Claim 12, wherein the upsampling resolution used in the slice prediction residual upsampler is signaled by parameters in the image slice.

20

17. The video decoder as defined in Claim 12, wherein the image slice is divided into image blocks, and the prediction residual is formed subsequent to an intra prediction for the image blocks.

25 18. The video decoder as defined in Claim 17, wherein the intra prediction is performed using one of 8x8 and 32x32 prediction modes.

19. The video decoder as defined in Claim 12, wherein the image slice is divided into image blocks, and the prediction residual is formed subsequent to an
30 inter prediction for the image blocks.

20. The video decoder as defined in Claim 12, wherein the slice prediction residual upsampler (715) applies an upsampling operation to only one of a horizontal direction and a vertical direction of the prediction residual.

21. The video decoder as defined in Claim 12, wherein the image slice is divided into macroblocks, and a reference index coded for an individual macroblock corresponds to whether the prediction residual for that individual macroblock will be
5 upsampled.

22. The video decoder as defined in Claim 12, wherein the video signal data corresponds to an interlaced picture, the image slice is divided into image blocks, and said slice prediction residual upsampler (715) upsamples the prediction
10 residual in one of a same mode as a current one of the coded image blocks, the same mode being one of a field mode and a frame mode.

23. A method for encoding video signal data for an image slice, the method comprising the steps of:
15 downsampling (825) a prediction residual of the image slice;
transforming (830) the prediction residual; and
quantizing (830) the prediction residual, wherein the step of downsampling (825) is performed prior to the transforming or quantizing steps.

20 24. The method as defined in Claim 23, wherein the image slice comprises video data in compliance with the International Telecommunication Union, Telecommunication Sector (ITU-T) H.264 standard.

25 25. The method as defined in Claim 23, wherein said downsampling step (825) comprises one of the steps of respectively applying different downsampling operations for a horizontal direction and a vertical direction of the prediction residual or applying a downsampling operation to only one of the horizontal direction and the vertical direction.

30 26. The method as defined in Claim 23, wherein a downsampling resolution used for said downsampling step is signaled by parameters in the image slice.

27. The method as defined in Claim 23, wherein the image slice is divided into image blocks, and the prediction residual is formed subsequent to an intra prediction for the image blocks.

5 28. The method as defined in Claim 27, wherein the intra prediction is performed using one of 8x8 and 32x32 prediction modes.

29. The method as defined in Claim 23, wherein the image slice is divided into image blocks, and the prediction residual is formed subsequent to an inter
10 prediction for the image blocks.

30. The method as defined in Claim 29, wherein the inter prediction is performed using 32x32 macroblocks and 32x32, 32x16, 16x32, and 16x16
15 macroblock partitions or 16x16, 16x8, 8x16, and 8x8 sub-macroblock partitions.

31. The method as defined in Claim 23, wherein the image slice is divided into macroblocks, and the method further comprises the step of determining whether
the prediction residual for an individual macroblock will be downsampled based on a
reference index coded for that individual macroblock, the reference index
20 corresponding to whether or not the prediction residual for that individual macroblock
will be downsampled.

32. The method as defined in Claim 23, wherein the image slice is divided into macroblocks, and the method further comprises the step of flexibly ordering the
25 macroblocks in response to parameters in a picture parameters set.

33. The method as defined in Claim 23, wherein the video signal data corresponds to an interlaced picture, the image slice is divided into image blocks, and
said downsampling step (825) downsamples the prediction residual in one of a same
mode as a current one of the image blocks, the same mode being one of a field mode
30 and a frame mode.

34. A method for decoding video signal data for an image slice, the method comprising the steps of:

upsampling (925) a prediction residual of the image slice; and
combining (930) the upsampled prediction residual to a predicted reference.

35. The method as defined in Claim 34, wherein the image slice comprises
5 video data in compliance with the International Telecommunication Union,
Telecommunication Sector (ITU-T) H.264 standard.

36. The method as defined in Claim 34, wherein the image slice is divided
into macroblocks, and the method further comprises the step of determining whether
10 the video decoder is in a Reduced Resolution Update (RRU) mode in response to
reference indices at a macroblock level, and wherein said upsampling step comprises
the step of upsampling a prediction residual for a current macroblock to decode the
current macroblock.

15 37. The method as defined in Claim 34, wherein said upsampling step (925)
comprises one of the steps of respectively applying different upsampling operations
for a horizontal direction and a vertical direction of the prediction residual or applying
an upsampling operation to only one of the horizontal direction and the vertical
direction.

20 38. The method as defined in Claim 34, wherein an upsampling resolution
used for said upsampling step is signaled by parameters in the image slice.

39. The method as defined in Claim 34, wherein the image slice is divided
25 into image blocks, and the prediction residual is formed subsequent to an intra
prediction for the image blocks.

40. The method as defined in Claim 39, wherein the intra prediction is
performed using one of 8x8 and 32x32 prediction modes.

30 41. The method as defined in Claim 34, wherein the image slice is divided
into image blocks, and the prediction residual is formed subsequent to an inter
prediction for the image blocks.

42. The method as defined in Claim 41, wherein the inter prediction is performed using 32x32 macroblocks and 32x32, 32x16, 16x32, and 16x16 macroblock partitions or 16x16, 16x8, 8x16, and 8x8 sub-macroblock partitions.

5 43. The method as defined in Claim 34, wherein the image slice is divided into macroblocks, and the method further comprises the step of determining whether the prediction residual for an individual macroblock will be upsampled based on a reference index coded for that individual macroblock, the reference index
10 corresponding to whether or not the prediction residual for that individual macroblock will be upsampled.

 44. The method as defined in Claim 34, wherein the video signal data corresponds to an interlaced picture, the image slice is divided into image blocks, and said upsampling step upsamples the prediction residual in one of a same mode as a
15 current one of the image blocks, the same mode being one of a field mode and a frame mode.





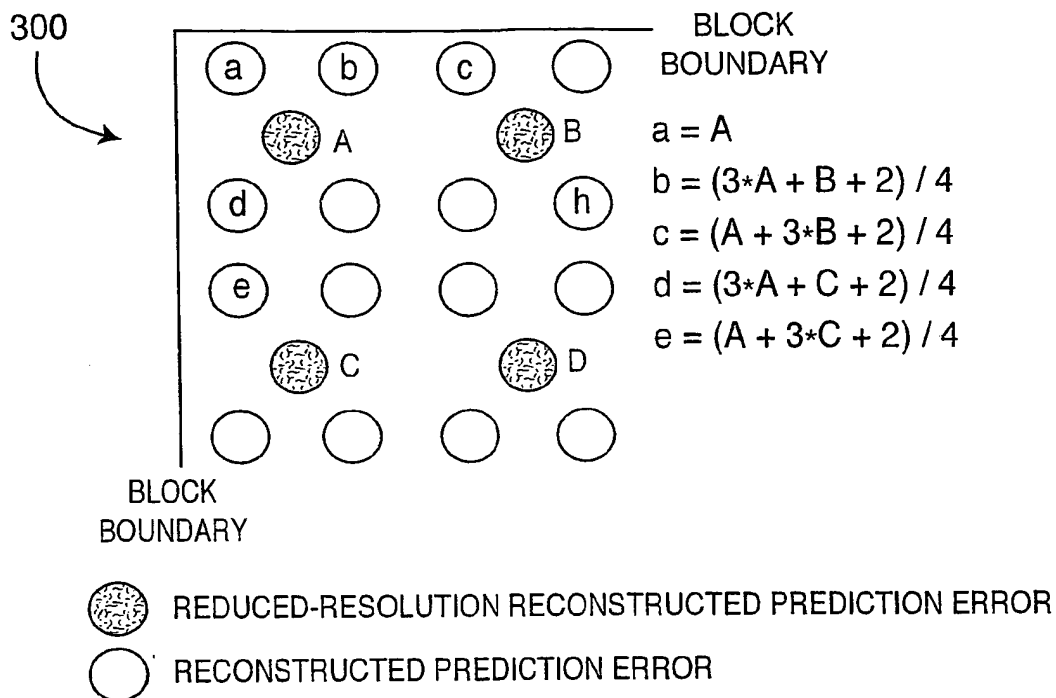
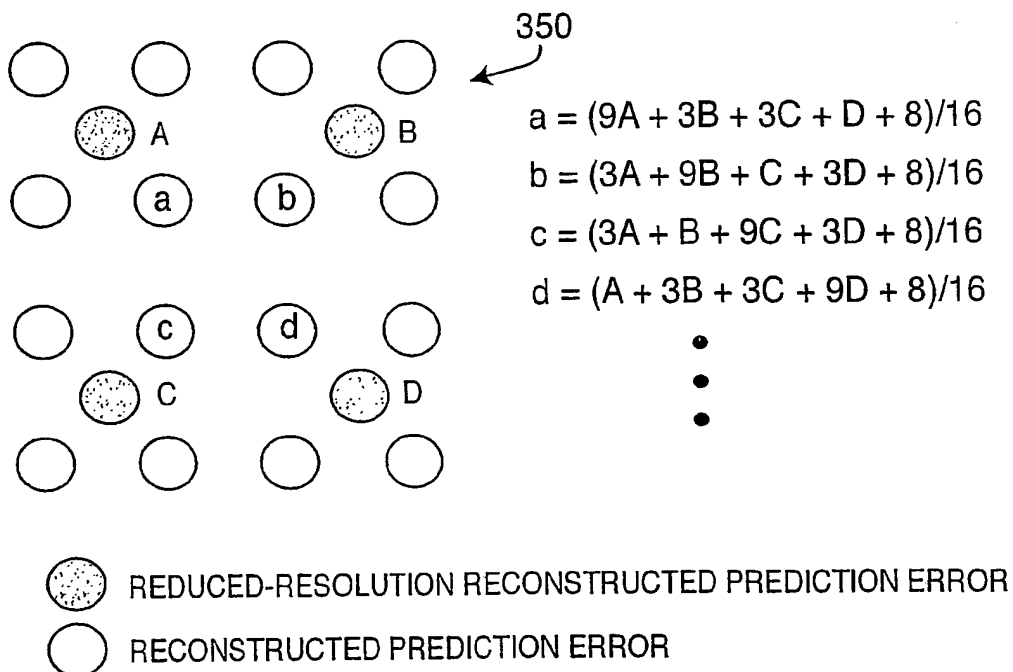
FIG.1



200






X	C1	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15
R0	a00	a01	a02	a03	a04	a05	a06	a07								
R1	a10	a11	a12	a13	a14	a15	a16	a17								
R2	a20	a21	a22	a23	a24	a25	a26	a27								
R3	a30	a31	a32	a33	a34	a35	a36	a37								
R4	a40	a41	a42	a43	a44	a45	a46	a47								
R5	a50	a51	a52	a53	a54	a55	a56	a57								
R6	a60	a61	a62	a63	a64	a65	a66	a67								
R7	a70	a71	a72	a73	a74	a75	a76	a77								


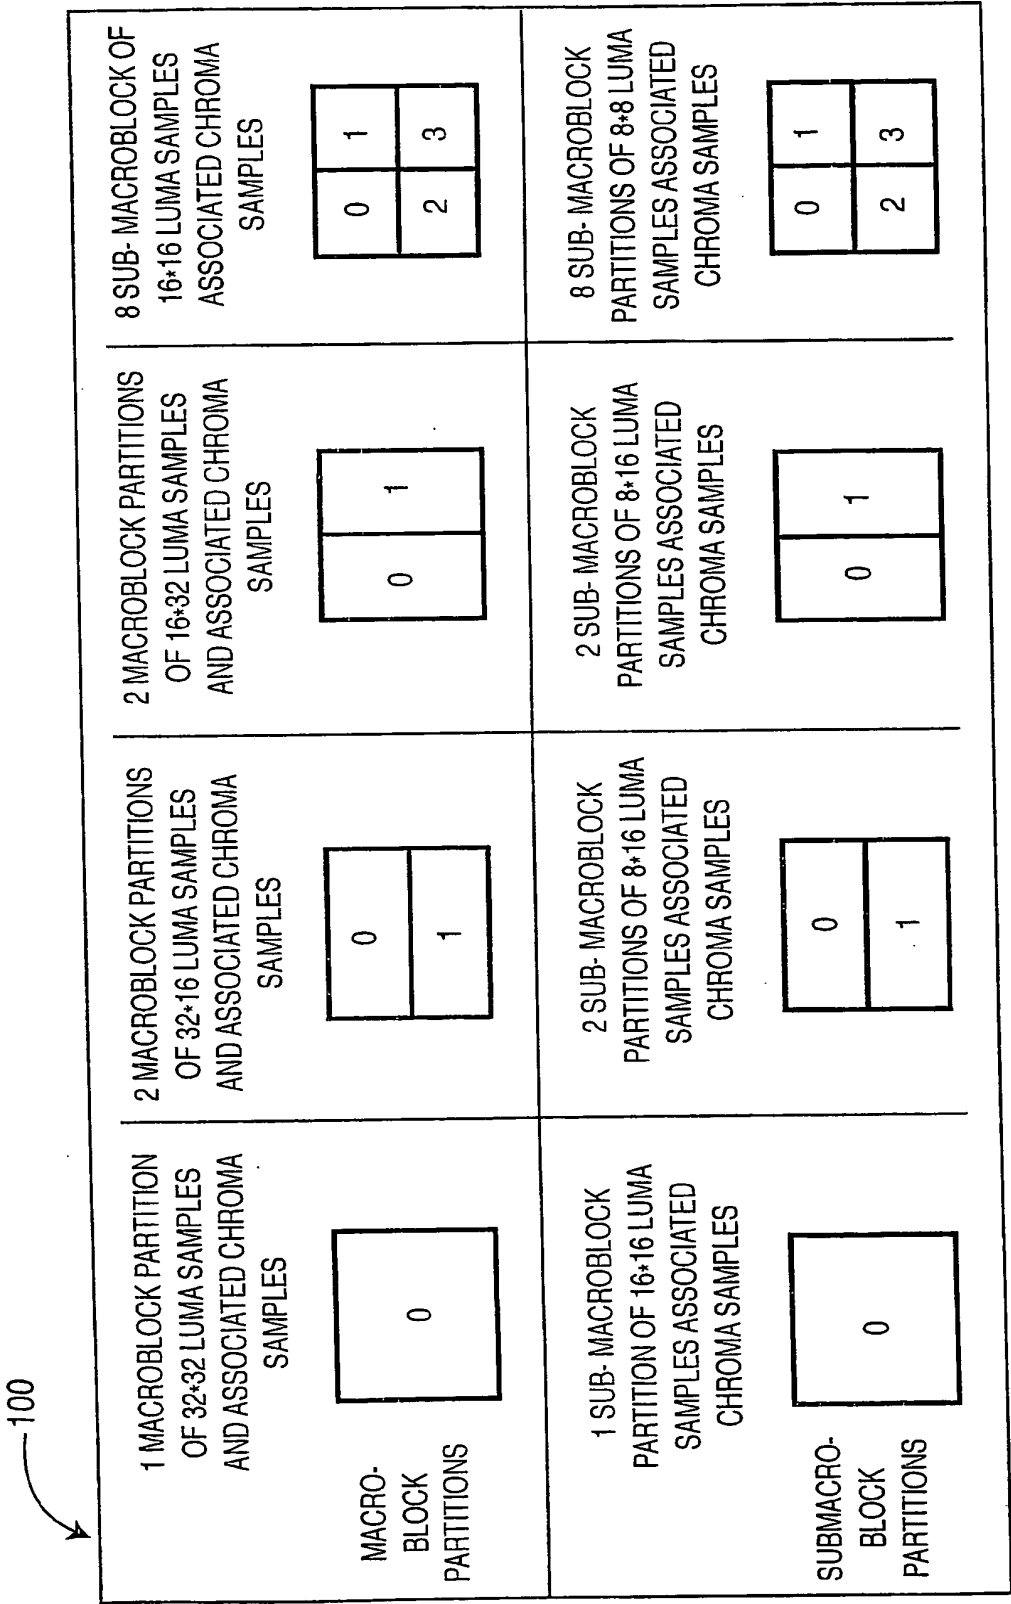
FIG. 2

**FIG. 3A****FIG. 3B**

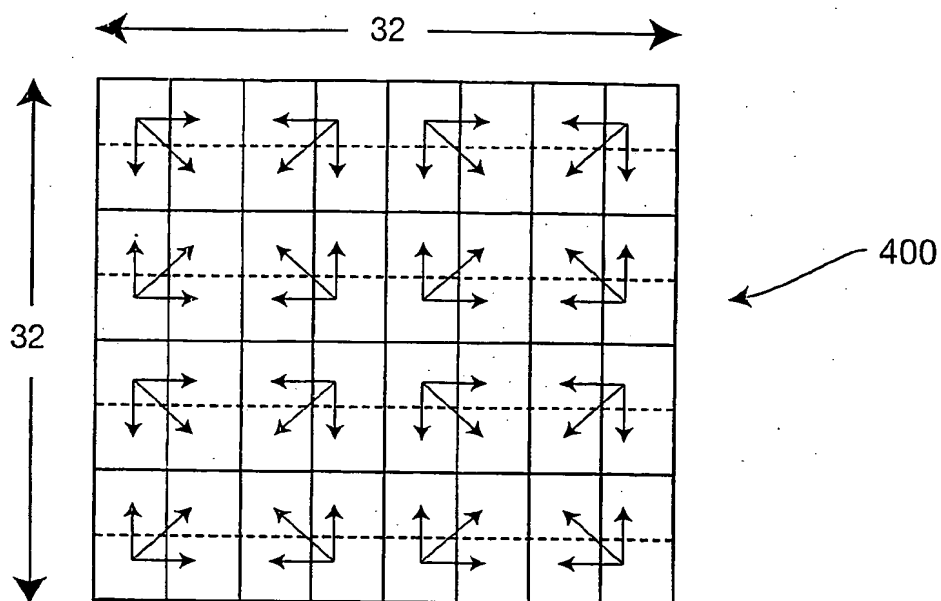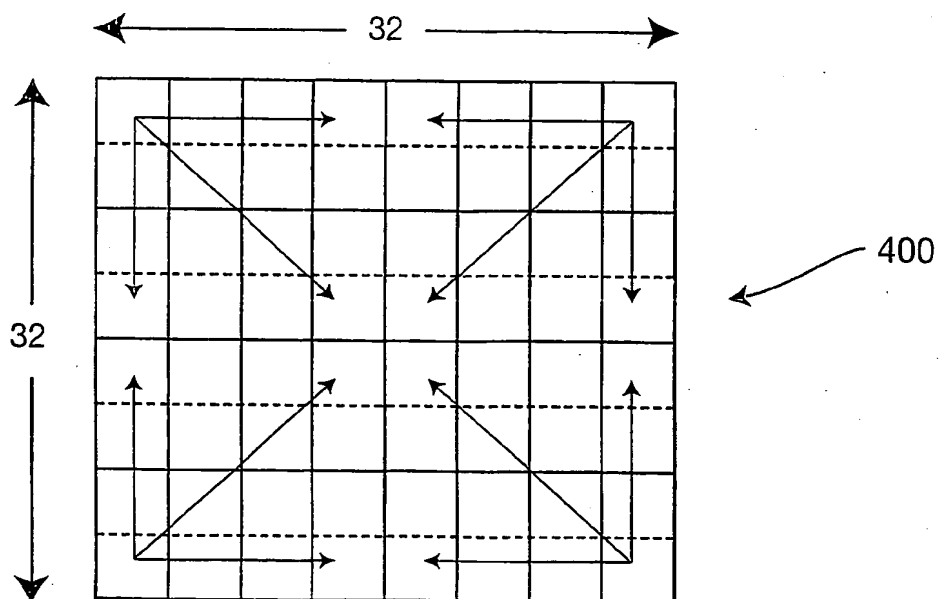**FIG. 4A****FIG. 4B**

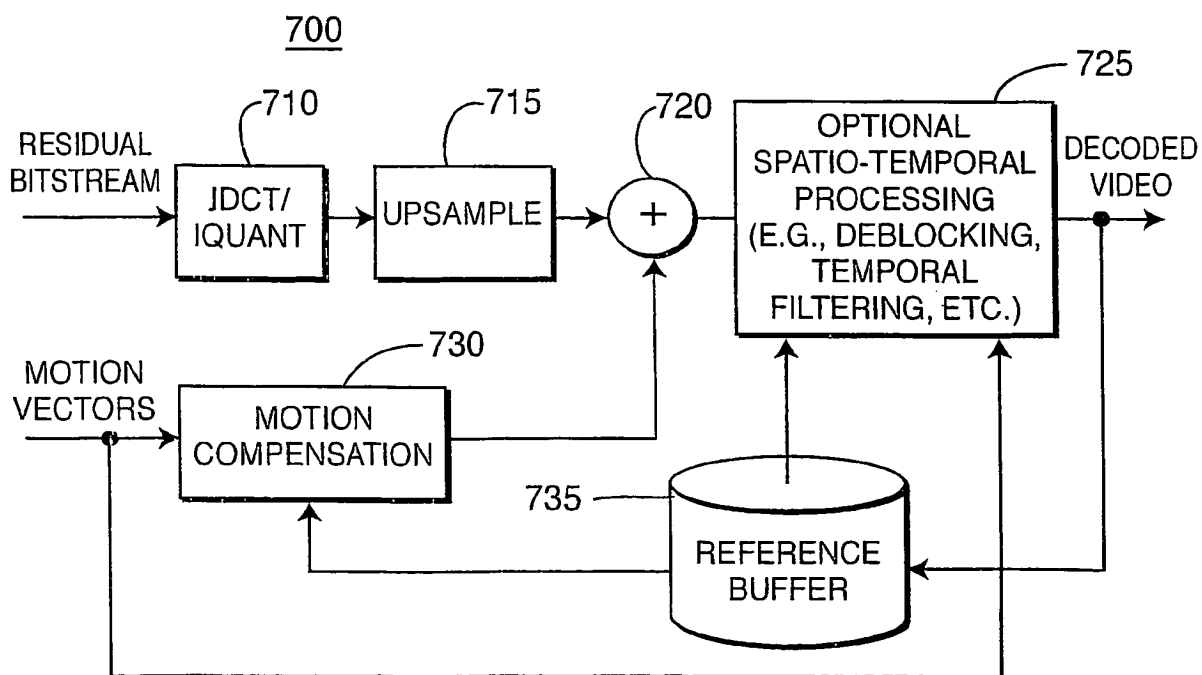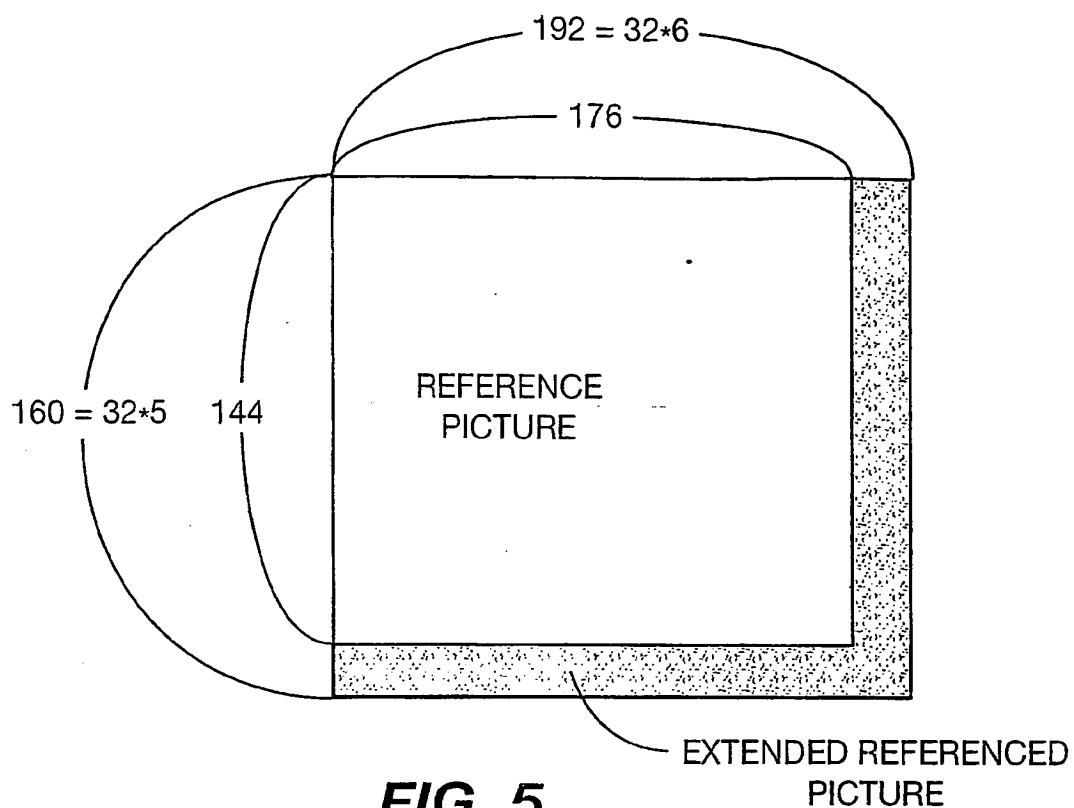

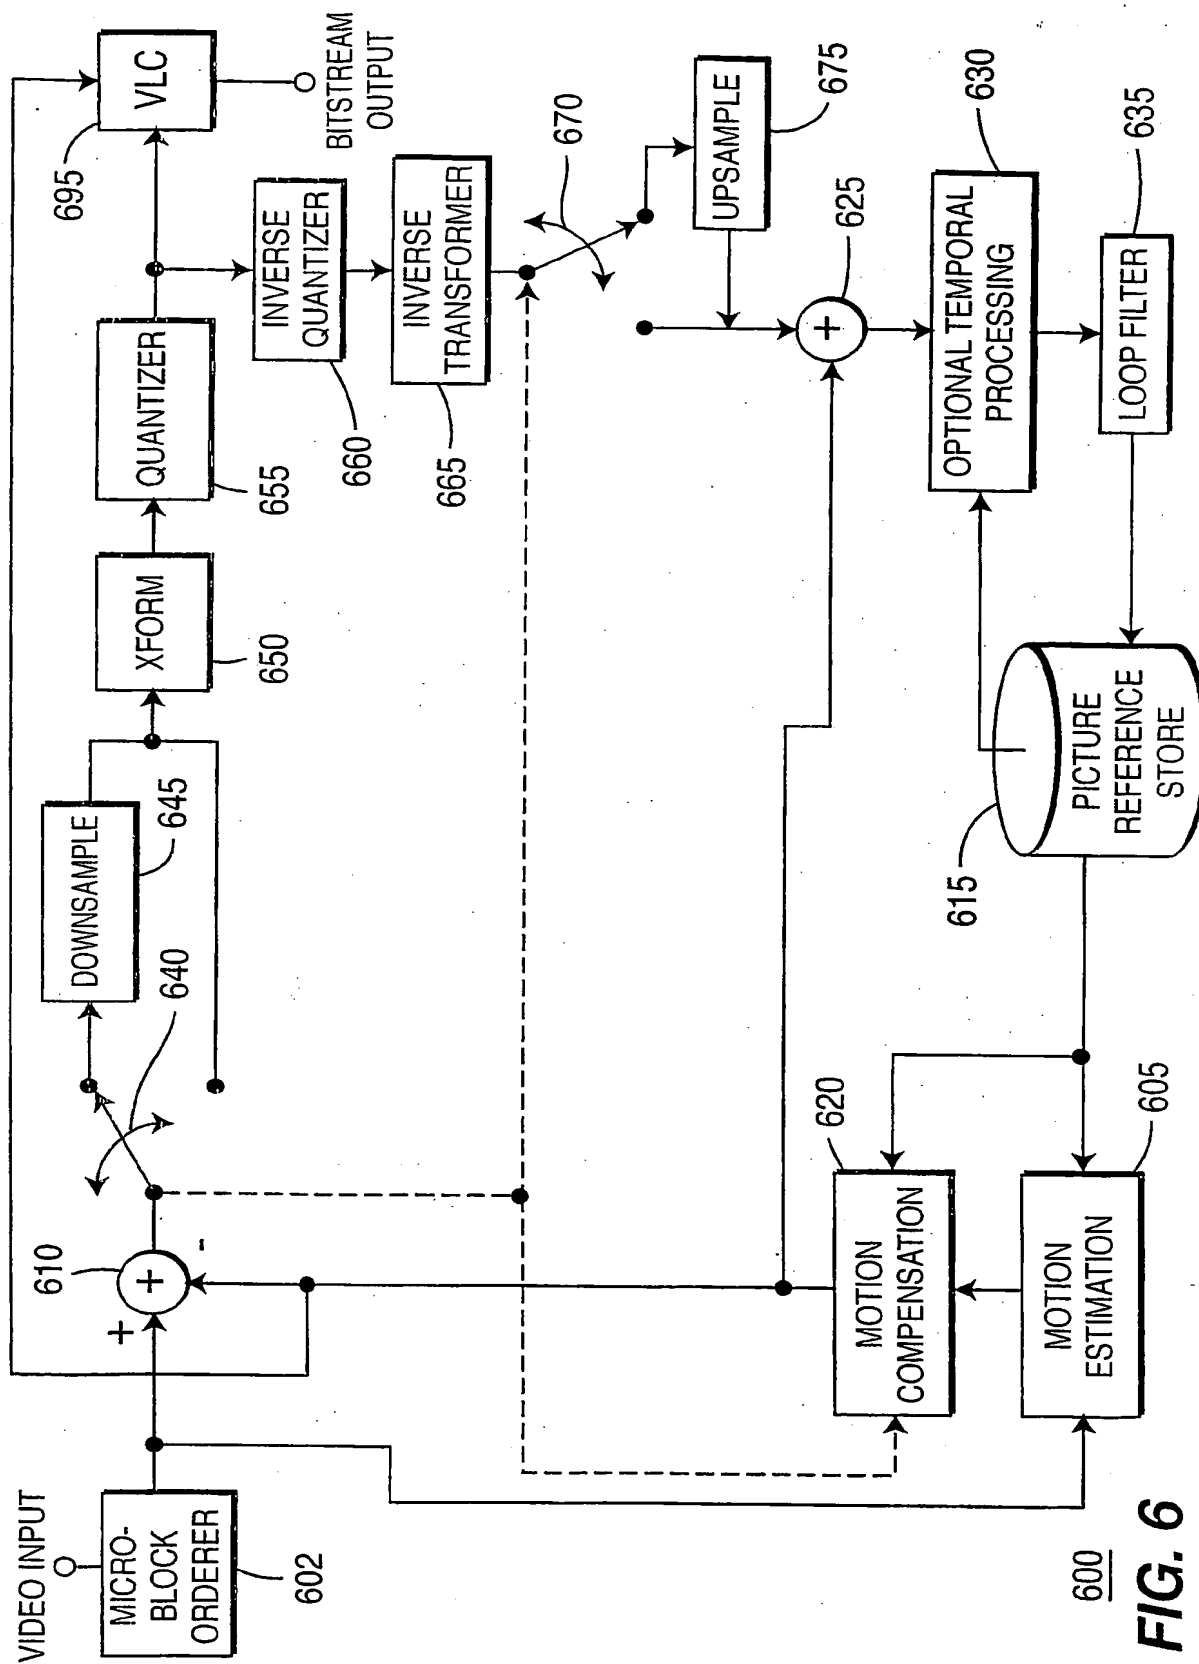

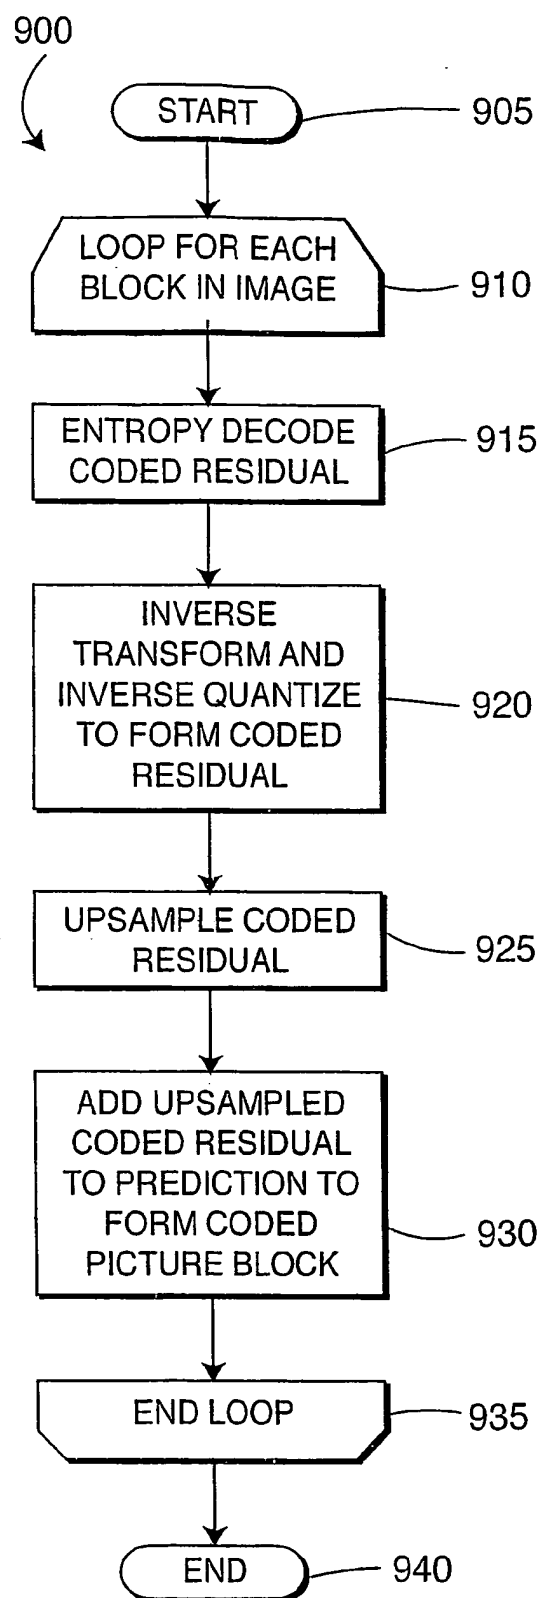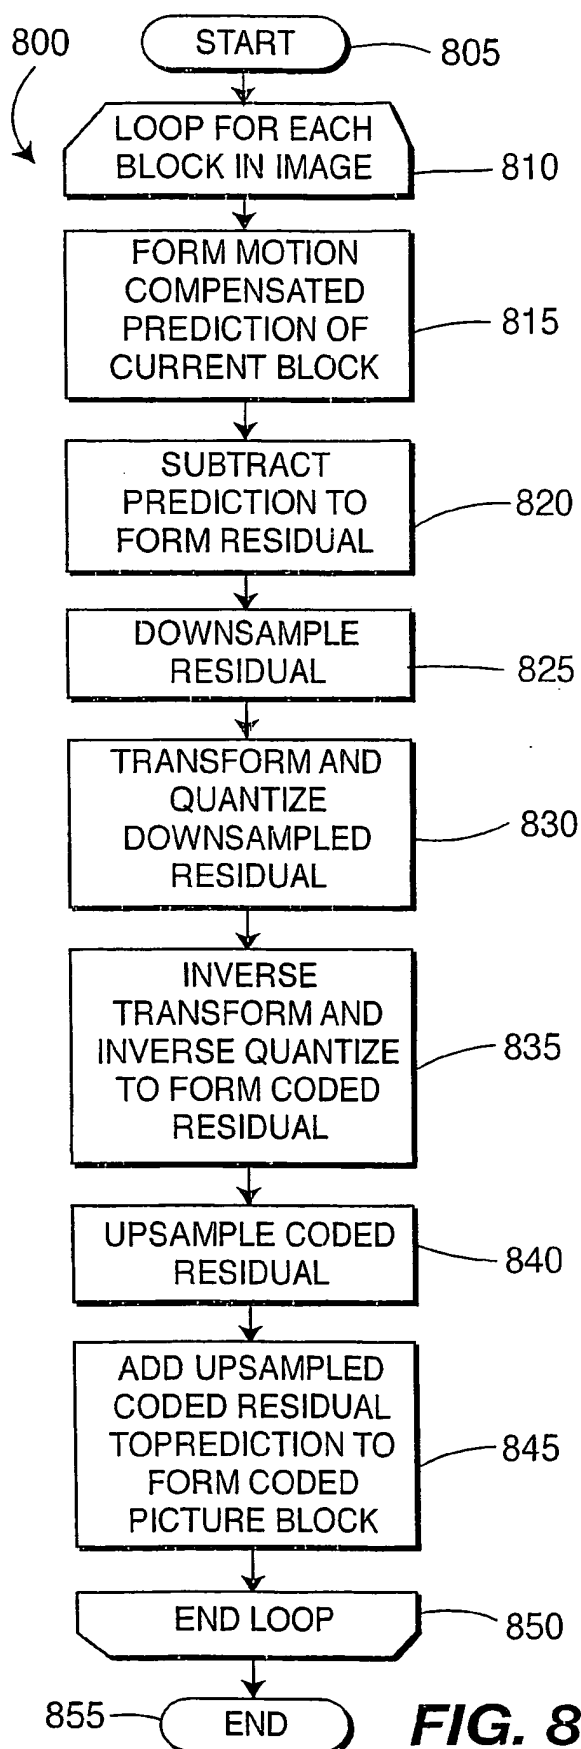

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)


PCT

(10) International Publication Number
WO 2005/093661 A3

- (51) International Patent Classification?: **H04N 7/26**, 7/50, 7/46
- (21) International Application Number: **PCT/US2005/006453**
- (22) International Filing Date: **1 March 2005 (01.03.2005)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/551,417 9 March 2004 (09.03.2004) US
- (71) Applicant (for all designated States except US): **THOMSON RESEARCH FUNDING CORPORATION** [—/US]; 10330 North Meridian Street, INH 340, Indianapolis, IN 46290 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **TOURAPIS, Alexandros** [GR/US]; 20212 Heather Drive, West Windsor, New Jersey 08550 (US). **BOYCE, Jill, MacDonald** [US/US]; 3 Brandywine Court, Manalapan, New Jersey 07726 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **REDUCED RESOLUTION UPDATE MODE FOR ADVANCED VIDEO CODING**

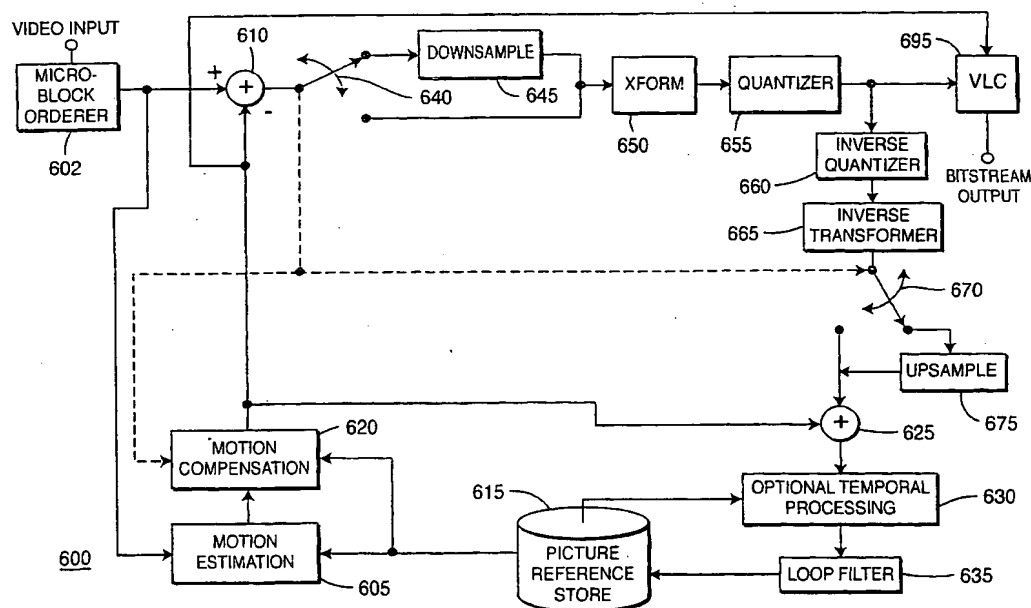

(57) Abstract: There is provided a video encoder, video decoder and corresponding encoding and decoding methods for respectively encoding and decoding video signal data for an image slice. The video encoder includes a slice prediction residual downsampler (645) for downsampling a prediction residual of at least a portion of the image slice prior to transformation and quantization of the prediction residual. The video decoder includes a prediction residual upsampler (715) for upsampling a prediction residual of the image slice.

WO 2005/093661 A3



Published:

— with international search report

(88) Date of publication of the international search report:

29 December 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/006453

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/26 H04N7/50 H04N7/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>"Recommendation H.263: Video coding for low bit rate communication" ITU-T DRAFT RECOMMENDATION H.263, February 1998 (1998-02), pages 1-167, XP002176560 cited in the application</p> <p>page 4, paragraph 3.4.9 page 9 - page 13, paragraph 4.2 page 23 - page 27, paragraphs 5.1.3, 5.1.4 page 85 - page 88, paragraphs K.1, K.2 page 129 - page 142, paragraphs Q.1-Q.7.2 Figure 3/H.263 figure Q.1/H.263</p> <p style="text-align: center;">----- --/--</p>	<p>1-3, 5-8, 12, 13, 15, 17-20, 23-25, 27-30, 32, 34, 35, 37, 39-42</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

24 May 2005

Date of mailing of the international search report

06.10.2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lombardi, G

INTERNATIONAL SEARCH REPORT

International Application No
 () /US2005/006453

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"TEXT OF FINAL COMMITTEE DRAFT OF JOINT VIDEO SPECIFICATION (ITU-T REC. H.264 / ISO/IEC 14496-10 AVC)" INTERNATIONAL ORGANIZATION FOR STANDARDIZATION - ORGANISATION INTERNATIONALE DE NORMALISATION, July 2002 (2002-07), pages I-XV,1, XP001100641 cited in the application page 9, paragraph 6.2 page 11 - page 12, paragraph 6.4 figures 6-5,6-6 page 67 - page 72, paragraph 8.5 page 136 - page 141, paragraph 12.4.1 page 33 - page 34, paragraph 7.4.2.2</p>	<p>1-3,5-8, 12,13, 15, 17-20, 23-25, 27-30, 32,34, 35,37, 39-42</p>
A	<p>US 5 262 854 A (NG ET AL) 16 November 1993 (1993-11-16)</p> <p>the whole document</p>	<p>1-3,5-8, 12,13, 15, 17-20, 23-25, 27-30, 32,34, 35,37, 39-42</p>
A	<p>WO 95/15538 A (POLAROID CORPORATION) 8 June 1995 (1995-06-08)</p> <p>page 11, line 27 - page 23, line 16</p>	<p>1-3,5-8, 12,13, 15, 17-20, 23-25, 27-30, 32,34, 35,37, 39-42</p>

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2005/006453

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-3, 5-8, 12, 13, 15, 17-20, 23-25, 27-30, 32, 34, 35, 37, 39-42

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-3,5-8,12,13,15,17-20,23-25,27-30,32,34,35,37,39-42

Video encoder with prediction residual downsampling before transform and quantization.

- 1.1. claims: 1,2,5-7,12,13,17-19,23,24,27-30,32,34,35,39-42

Video encoder with prediction residual downsampling before transform and quantization compliant with ITU-T H.264 standard.

- 1.2. claims: 1,3,8,12,15,20,23,25,34,37

Video encoder with prediction residual downsampling before transform and quantization with downsampling operation depending on direction.

2. claims: 1,4,9,10-12,14,16,21-23,26,31,33,34,36,38,43

Video encoder with prediction residual downsampling before transform and quantization with downsampling operation performed in units of slices.


INTERNATIONAL SEARCH REPORT

Information on patent family members

national Application No

PCT/US2005/006453

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5262854	A	16-11-1993	AU 3434293 A	13-09-1993
			BR 9305941 A	21-10-1997
			CA 2130479 A1	02-09-1993
			CN 1076824 A	29-09-1993
			CZ 9401954 A3	15-02-1995
			DE 69324134 D1	29-04-1999
			DE 69324134 T2	28-10-1999
			DK 627153 T3	17-04-2000
			EP 0627153 A1	07-12-1994
			ES 2130252 T3	01-07-1999
			HU 70722 A2	30-10-1995
			JP 7504074 T	27-04-1995
			KR 266238 B1	15-09-2000
			MX 9300930 A1	01-08-1993
			PL 170173 B1	31-10-1996
			RU 2106759 C1	10-03-1998
			SG 64306 A1	27-04-1999
			SK 98194 A3	05-01-1995
			TR 26490 A	15-03-1995
			WO 9317523 A1	02-09-1993
WO 9515538	A	08-06-1995	AT 159366 T	15-11-1997
			CA 2171335 A1	08-06-1995
			DE 69406306 D1	20-11-1997
			DE 69406306 T2	29-01-1998
			EP 0731957 A1	18-09-1996
			JP 9506193 T	17-06-1997
			US 5740284 A	14-04-1998
			US 5774598 A	30-06-1998
			US 5729631 A	17-03-1998
			US 5719958 A	17-02-1998
			US 5748770 A	05-05-1998

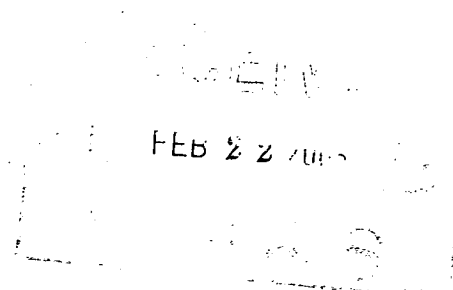

THIS PAGE BLANK (USPTO)